

Protect Your Investment With



PREMIER PAINT PROTECTION

MOLECULARLY BONDED CERAMICS

Unprotected Vehicle Surface
Acid Rain UV Rays Bird Droppings



Vehicle Surface with Auto Butler Protection




3 Year paint maintenance program with a warranty covering environmental hazards.



The Auto Butler program is unique 2-step process:


Step 1: Using the revolutionary Auto Butler Polisher, your paint is first polished to enhance the shine while preparing the surface for our ceramic protective coating.

Step 2: Our exclusive ceramic infused paint sealant is machine applied, molecularly bonding the ceramics to your paint, effectively shielding it from the elements.

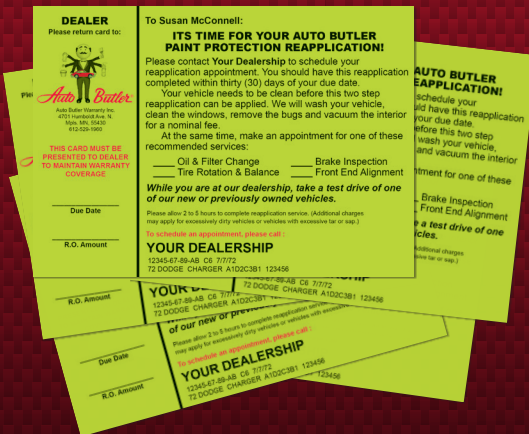

5 Reminders are mailed to you (one every 6 months) inviting you back to your dealership for your reapplication.

Don't Let These Common Problems Damage Your Vehicle's Paint

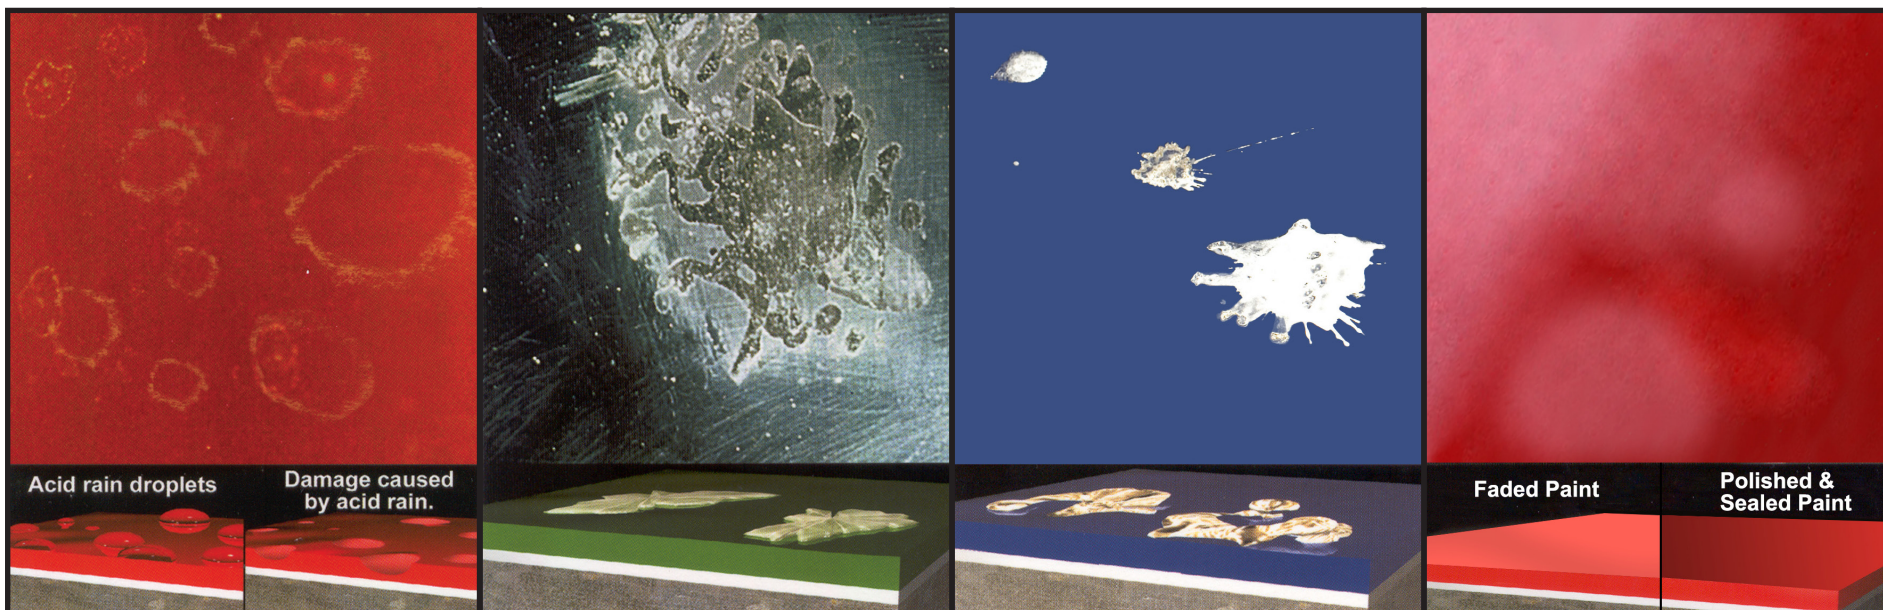

ACID RAIN

Appearance:

Irregular patches of rough, discolored, or disintegrated surface possibly resulting in a crazing or cracking appearance.

Cause:

Exposure to rain containing effluents from manufacturing, chemical industry and power stations.

Prevention:

- Remove harmful water soluble contaminants by regular washing.
- Avoid parking near factories that produce chemical fallout
- Polish and seal paint regularly

TREE SAP

Appearance:

Sap spots that resemble spots of pancake syrup in various sizes.

Cause:

Tree sap in contact with vehicle's finish. If not removed it will cause the paint to crack.

Prevention:

- Regular maintenance of the vehicle's finish
- Remove contaminants before finish damage can occur
- Avoid parking vehicle under trees
- Polish and seal paint regularly

BIRD DROPPINGS

Appearance:

Finish damage or spot etching. The longer the dropping stays on the finish, the more severe the etching may become.

Cause:

The problem is seasonal, regional, and affected by the bird population. The organic etching is accelerated by intensified heat.

Prevention:

- Remove as quickly as possible
- Regular washing
- Polish and seal paint regularly

FADED PAINT

Appearance:

Cloudy, hazy or dull finish.

Cause:

Ultraviolet rays degrading the finish. More than .5 mil of clearcoat removed during a surface repair.

Prevention:

- Never remove more than .5 mil of clearcoat during surface repair
- Garage your vehicle
- Polish and seal paint regularly

Auto Butler® **Has The Solution!**